



1

3

## A short note on the general boundary element method for viscous flows with high Reynolds number

X. Y. Zhao<sup>†</sup> and S. J. Liao<sup>\*,‡</sup>

5

*School of Naval Architecture and Ocean Engineering, Shanghai JiaoTong University, Shanghai 200030, China*

### SUMMARY

7

In this paper, the general boundary element method and the parallel computation are employed to solve laminar viscous flows in a driven square cavity, governed by the exact Navier–Stokes equations. Using the solution at  $Re = 0$  as the initial approximation, the convergent numerical results for high Reynolds number at  $Re = 7500$  are obtained, for the first time, by the boundary element method. This verifies the validity and great potential of the general boundary element method for highly non-linear problems, which may greatly enlarge application regions of the boundary element method in science and engineering. Copyright © 2003 John Wiley & Sons, Ltd.

11

13

KEY WORDS: general BEM; N–S equation; driven cavity flow; parallel computing

15

### 1. INTRODUCTION

17

It is well known that the boundary element method (BEM) often fails to give convergent numerical results of highly non-linear problems. For example, although the problem of the viscous flow in a driven square cavity at high Reynolds number has been solved by iterative numerical techniques [1] of the finite difference method (FDM), the finite volume method (FVM) and so on, to the best of our knowledge, *no* one has successfully employed the BEM to give convergent results at the high Reynolds number  $Re = 7500$  (see References [2, 3]). This is mainly because the BEM is based on the superposition of fundamental solutions of linear operators so that it is in principle suitable for linear problems and weakly non-linear problems.

19

21

23

25

The so-called general boundary element method (GBEM) was proposed by Liao and his co-authors [4–9] to overcome the limitations of the traditional BEM. The GBEM is valid

\* Correspondence to: Shijun Liao, School of Naval Architecture and Ocean Engineering, Shanghai JiaoTong University, Shanghai 200030, China.

<sup>†</sup> E-mail: xyzhao@sjtu.edu.cn

<sup>‡</sup> E-mail: sjliao@mail.sjtu.edu.cn

Contract/sponsor grant: National Science Foundation of China; contract/sponsor number: 50125923.

Contract/sponsor grant: Ministry of Education of China.

1 even if a non-linear equation does not contain any linear terms at all. Thus, the GBEM is  
 2 more general and is valid for highly non-linear problems. The GBEM is based on an analytic  
 3 technique for non-linear problems, namely the homotopy analysis method [10–14]. Thus, it has  
 4 a solid mathematical base. Different from well-known perturbation techniques, the homotopy  
 5 analysis method is valid even if a non-linear problem does not contain any small parameters  
 6 at all. Especially, unlike *all* other analytic techniques for non-linear problems, the homotopy  
 7 analysis method provides us with a simple way to *control* the convergence of approximation  
 8 series and *adjust* convergence region and rate, as mentioned by Liao [14]. This is the main  
 9 reason why the GBEM is valid for strong non-linear problems.

10 It is well known that domain integrals appear when the BEM is employed to solve a non-  
 11 linear problem, which considerably increase the CPU time. In this paper, we propose a parallel  
 12 general boundary element method by using parallel computations. To show its validity, our  
 13 approach is applied to the viscous flow in a driven square cavity, and the convergent numerical  
 results are obtained even at high Reynolds number  $Re = 7500$ .

15

## 2. MATHEMATICAL FORMULATION

16 Consider laminar viscous flow in a driven cavity, governed by the dimensionless Navier–  
 17 Stokes equations written in the vorticity  $\omega$  and streamfunction  $\psi$  as follows:

$$\nabla^2 \omega = Re \left( \frac{\partial \psi}{\partial y} \frac{\partial \omega}{\partial x} - \frac{\partial \psi}{\partial x} \frac{\partial \omega}{\partial y} \right) \quad (1)$$

$$\nabla^2 \psi + \omega = 0 \quad (2)$$

subject to the boundary conditions

$$\psi = \psi_b \quad \text{on } \Gamma \quad (3)$$

$$\frac{\partial \psi}{\partial n} = \left( \frac{\partial \psi}{\partial n} \right)_b \quad \text{on } \Gamma \quad (4)$$

19 where  $Re$  is the Reynolds number. To the best of our knowledge, no one has successfully  
 20 applied the boundary element methods to get convergent results of above equations at high  
 21 Reynolds number  $Re = 7500$  (see References [2, 3]).

22 In 1992 Liao [4] applied the boundary element method to solve the above-mentioned equa-  
 23 tions and obtained convergent results up to  $Re = 2000$  by means of a non-uniform grid  $40 \times 40$   
 and the following  $m$ th-order iterative formulas:

$$\omega_0^{i+1}(x, y) \leftarrow \omega_0^i(x, y) + \sum_{k=1}^m \omega_k^i(x, y) p^k \quad (5)$$

$$\psi_0^{i+1}(x, y) \leftarrow \psi_0^i(x, y) + \sum_{k=1}^m \psi_k^i(x, y) p^k \quad (6)$$

25

1 where  $p \in [0, 1]$  is a parameter to be chosen, the superscript  $i$  denotes the number of iteration,  $\omega_k^i(x, y)$  and  $\psi_k^i(x, y)$  are governed by

$$\nabla^2 \omega_k^i(x, y) = (\chi_k - 1) \nabla^2 \omega_{k-1}^i(x, y) + s_{k-1}(x, y) \tag{7}$$

$$\nabla^2 \psi_k^i(x, y) + \omega_k^i(x, y) = (\chi_k - 1) [\nabla^2 \psi_{k-1}^i(x, y) + \omega_{k-1}^i(x, y)] \tag{8}$$

3 subject to the boundary conditions

$$\psi_k^i(x, y) = 0 \quad \text{on } \Gamma \tag{9}$$

$$\frac{\partial \psi_k^i(x, y)}{\partial n} = 0 \quad \text{on } \Gamma \tag{10}$$

where

$$s_{k-1}(x, y) = Re \sum_{n=0}^{k-1} \left[ \frac{\partial \psi_n^i}{\partial y} \frac{\partial \omega_{k-1-n}^i}{\partial x} - \frac{\partial \psi_n^i}{\partial x} \frac{\partial \omega_{k-1-n}^i}{\partial y} \right] \tag{11}$$

and

$$\chi_k = \begin{cases} 0 & \text{when } k \leq 1 \\ 1 & \text{when } k > 1 \end{cases} \tag{12}$$

Note that Equations (7) and (8) with boundary conditions (9) and (10) can be easily solved by the traditional BEM. Liao [4] found that, when  $m = 1$  in iterative formulas (5) and (6), corresponding to a traditional BEM approach, one *cannot* get convergent results for  $Re > 400$ , no matter how small the value of  $p$  is. However, when  $m = 2$ , convergent results can be obtained by means of  $40 \times 40$  grid at Reynolds number up to  $Re = 2000$ , provided  $p$  is properly chosen. For details, please refer to Liao [4].

### 3. PARALLEL COMPUTING

It is well known that the BEM is efficient for linear differential equations. However, for a non-linear problem, much more CPU time is needed because the domain integral appears. Recently, parallel computing [15–19] becomes popular for the BEM. Note that it is very efficient and nearly straightforward to apply parallel computations to calculate integrals, mainly because any an integral is in principle parallel and can be divided into many independent integrals on independent sub-domains, i.e.

$$\iint_S f \, ds = \iint_{S_1} f \, ds + \iint_{S_2} f \, ds + \dots + \iint_{S_N} f \, ds$$

where

$$S = S_1 \cup S_2 \cup \dots \cup S_N, \quad S_1 \cap S_2 \cap \dots \cap S_N = 0$$

So, it is natural to employ parallel implementations for the GBEM. Here, we focus on parallel computation of the domain integral. Rather than the above-mentioned strategy, the data

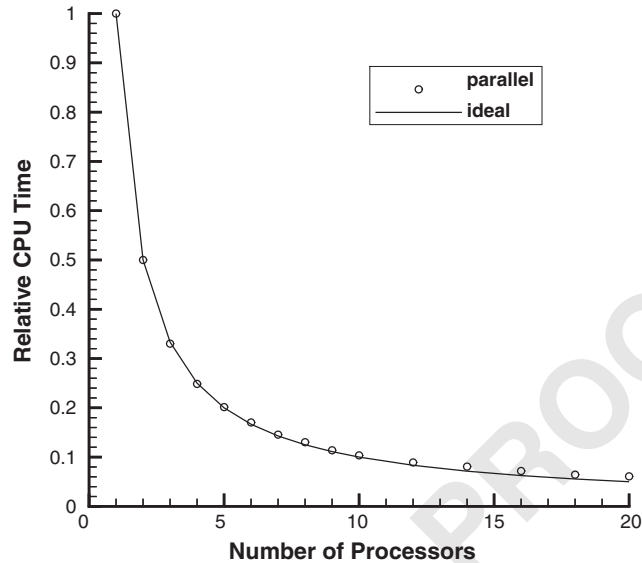


Figure 1. Relative CPU time required for different number of processors on a distributed-memory multicomputer. (mesh:  $96 \times 96$ ).

1 decomposition parallelization strategy [20] is employed, which yields an algorithm with very good load-balancing properties and high efficiency.

3 The proposed GBEM approach is parallelized by message passing interface (MPI) [21], a  
 5 widely used standard for writing message passing programs. The choice of message passing  
 7 library was determined by the requirement that the resulting code is portable to different  
 parallel computing platforms. There are two kinds of parallel computing systems: shared  
 memory and distributed memory ones. The higher efficiency of parallel computation can be  
 obtained by shared memory computing systems, while distributed one is more adaptive.

### 9 3.1. Implementation on a distributed memory system

11 First of all we employ a system of some personal computers (PC) connected by Local Area  
 Net (LAN). Each PC has a processor of Intel Pentium 866 with 128 M memory and is  
 13 connected by a 10 M hub, while one of them is chosen as the host. In this way we construct  
 an easy-to-use, low-cost computer system available for the parallel computation with data  
 15 communication between them, called the cluster computing system [22, 23]. Communications  
 by TCP/IP are carried out by the message passing library of MPI.

17 It is found that high parallel efficiency is obtained even by this low-cost cluster computing  
 system. If the number of processors is not large, the CPU time required is almost inversely  
 19 proportional to the number of processor, as shown in Figure 1. This is mainly because more  
 than 95% CPU time of our GBEM approach is spent for the integrals. As the number of  
 21 processors becomes large, the parallel performance decreases, mainly because the time for  
 communications between each PC through LAN increases. The parallel performance has been  
 investigated with two numerical grids,  $64 \times 64$  and  $96 \times 96$ . It is found that for a given

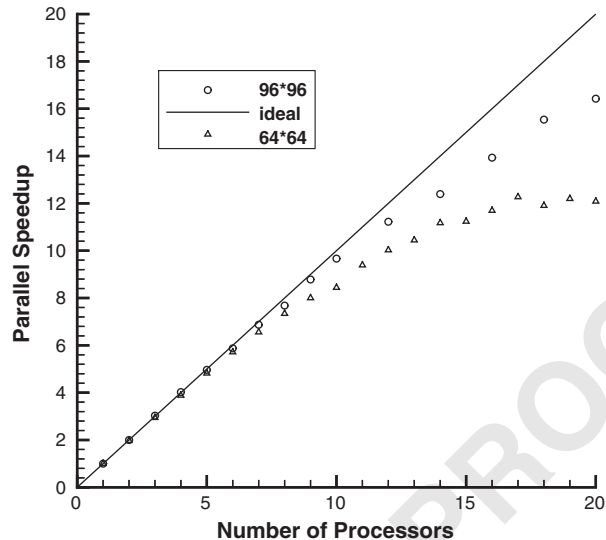


Figure 2. Parallel speed-up for different computational grids and number of processors on a distributed-memory multicomputer.

1 number of processors, the finer the grid, the more efficient the parallel computation, as shown in Figure 2.

### 3 3.2. Implementation on a shared memory system

To test the performance of our parallel GBEM approach on a high-performance parallel computer, we implement our code on SGI Onyx 3800, a supercomputer involving 64 processors at frequency of 500 MHz with 32 GB shared memory. MPI is supported by this machine so that our code can be employed without any changes.

Obviously, the shared memory makes the communications between different processors much faster. Thus, less time for message passing is needed and the efficiency is much higher, as shown in Figure 3. Therefore, the parallel performance of a parallel supercomputer with shared memory is higher than that of the cluster computing system with distributed memory. However, the cost of the latter is much lower than that of the former.

All of our calculations indicate that the parallel computation based on the data decomposition parallelization strategy [20] is indeed rather efficient for the general boundary element method, even by means of a low-cost cluster computing system.

## 4. NUMERICAL RESULTS

17 We use a non-uniform rectangle mesh as numerical grid. Since there is discontinuity in the velocity field at corners, a so-called 'double-node approach' technique is applied to treat the singularity at corners where there are two nodes rather close to each other but belonging to two different sides. We use linear elements and regular integral on the boundary. The domain

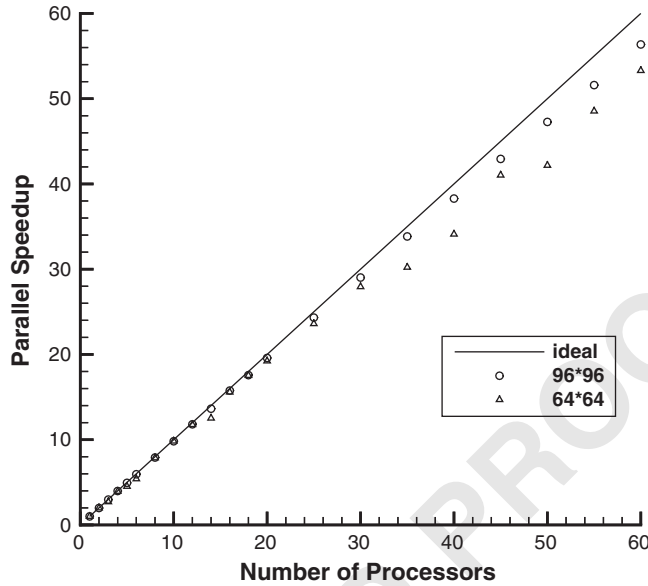


Figure 3. Parallel speed-up for different computational grids and number of processors on SGI Onyx 3800.

Table I. The value of the parameter  $p$ .

$Re$	1000	3200	5000	7500
$p$	0.05	0.01	0.005	0.002

1 integrals are calculated by four-point Gauss numerical integral method. For details please refer  
to Liao [4].  
3 The solution at  $Re=0$  can be obtained without iteration and therefore is used as our initial  
approximation. All of our numerical solutions for Reynolds number up to  $Re=7500$  are  
5 obtained starting from this initial. To ensure the convergence, we follow Liao [4] to use the  
second-order iterative formulas, namely  $m=2$  in (5) and (6). Note that we have freedom  
7 to choose the value of  $p \in [0, 1]$ , which provides us with a simply way to control the  
convergence of the iteration. It is found that the value of  $p$  had to be decreased as the Reynolds  
9 number increases, as shown in Table I. Besides, as the non-linearity becomes stronger, the  
number of iteration increases, as shown in Figure 3. It is found that, even at high Reynolds  
11 number, there always exists a small enough  $p$ , by means of which we can gain the correct,  
convergent results from the initial approximation obtained at  $Re=0$ . But, it is unknown right  
13 now how to find the best value of  $p$  to ensure the best convergence rate. When  $m=1$  in  
the iterative formulas (5) and (6), corresponding to the traditional BEM, we also fail to get  
15 convergent results for  $Re>400$ , as reported by Liao [4]. Like Liao [4], we cannot obtain  
convergent results at  $Re=7500$  by means of the grid  $40 \times 40$ , mainly because a fine enough

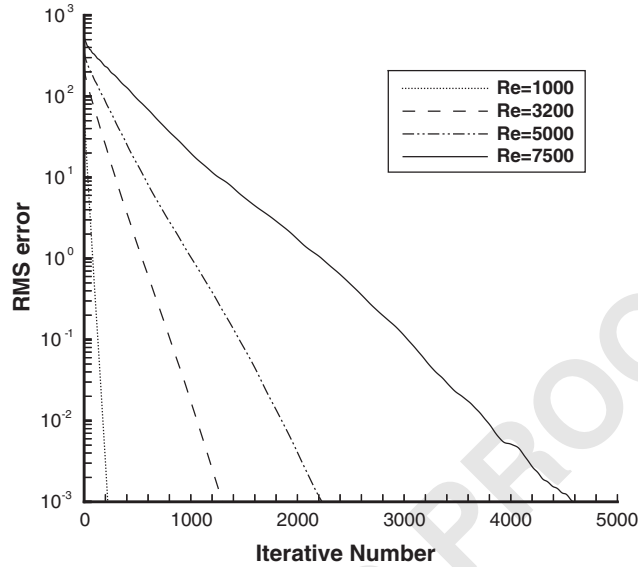


Figure 4. Root-mean-square errors via iterative number (mesh:  $64 \times 64$ ).

Table II. Comparison of the results about primary vortex with those given by Ghia *et al.* [24].

$Re$	Current results				Results given by Ghia <i>et al.</i>			
	$\psi_{\max}$	$\omega_{v,c}$	$x_{v,c}$	$y_{v,c}$	$\psi_{\max}$	$\omega_{v,c}$	$x_{v,c}$	$y_{v,c}$
1000	-0.1177	2.0640	0.5333	0.5667	-0.1179	2.0497	0.5313	0.5625
3200	-0.1197	1.9376	0.5177	0.5417	-0.1204	1.9886	0.5165	0.5469
5000	-0.1193	1.9048	0.5177	0.5333	-0.1190	1.8602	0.5117	0.5352
7500	-0.1184	1.8773	0.5083	0.5333	-0.1200	1.8799	0.5117	0.5322

1 grid had to be used to simulate the complicated flows at high Reynolds number in a driven  
2 square cavity.

3 The numerical results are presented for four different Reynolds numbers: 1000, 3200, 5000  
4 and 7500. The root-mean-square errors via the iterative number are shown in Figure 4. The  
5 comparisons of our numerical results given by grid mesh  $120 \times 120$  with respect to those  
6 reported by Ghia *et al.* [24] are shown in Table II. The velocity profiles of  $u$  at  $x = \frac{1}{2}$  and  
7  $v$  at  $y = \frac{1}{2}$ , compared with the results given by Ghia *et al.* [24], are shown in Figure 5 and  
8 6, respectively. The contours of the stream-function are shown in Figures 7. All of our  
9 numerical results agree well with the solutions provided by Ghia *et al.* [24] by mean of the  
10 finite difference method.

11 It should be emphasized that, to the best of our knowledge, *no* one has gained convergent  
12 results for the viscous flow in a driven square cavity at  $Re = 7500$  by the *boundary element*  
13 *method*. This verifies that the general boundary element method is indeed valid for highly  
14 non-linear problems and therefore might greatly enlarge application regions of the boundary  
15 element method in science and engineering.

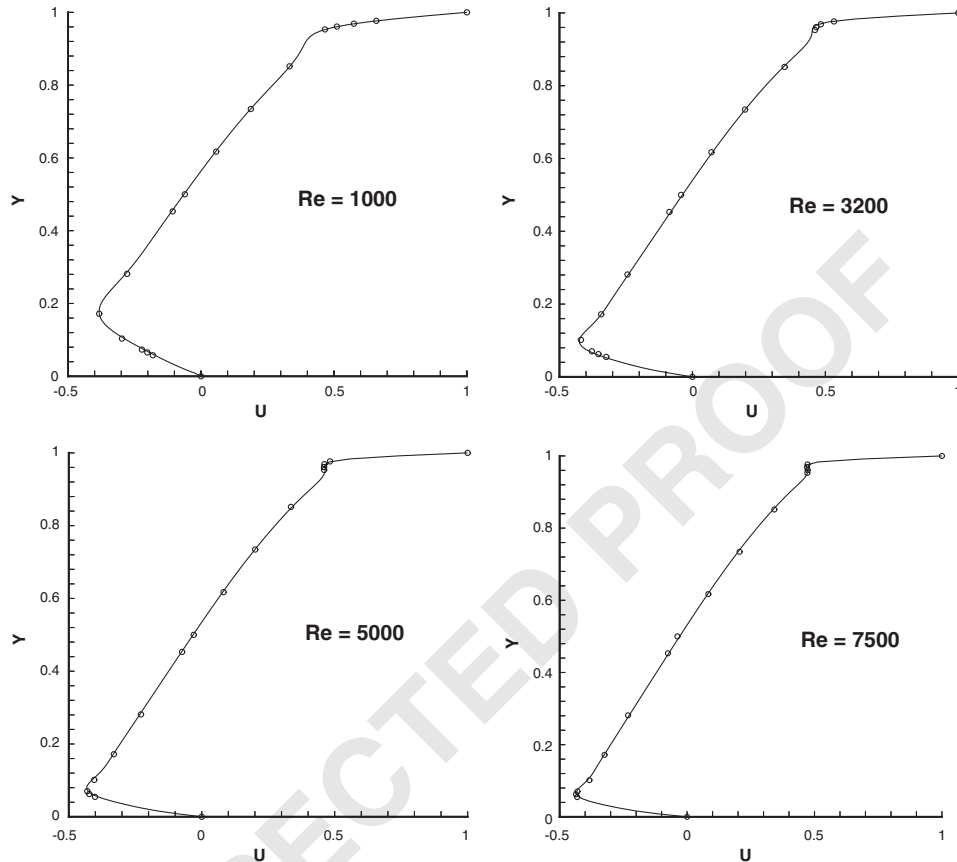


Figure 5. Profiles of velocity  $u$  at  $x = \frac{1}{2}$  for  $Re = 1000, 3200, 5000, 7500$ . Solid line: current result; circle: results given by Ghia *et al.* [24].

1

## 5. CONCLUSION

In this paper, the general boundary element method and the parallel computation are employed to solve laminar viscous flows in a driven square cavity, governed by the exact Navier–Stokes equations. Using the solution at  $Re = 0$  as the initial approximation, the convergent numerical results for high Reynolds number at  $Re = 7500$  are obtained, for the first time, by the boundary element method. This verifies the validity and great potential of the general boundary element method for highly non-linear problems, which may greatly enlarge application regions of the boundary element method in science and engineering.

When the boundary element method is employed to non-linear problems, most of CPU time is spent to calculate integrals. Thus, it is certainly very efficient and straightforward to apply the parallel computation to the BEM. On the one side it is easy to make a cluster computing system with low-cost, and on the other side the appearance of MPI makes parallel computation convenient and popular. So, combining the general boundary element method



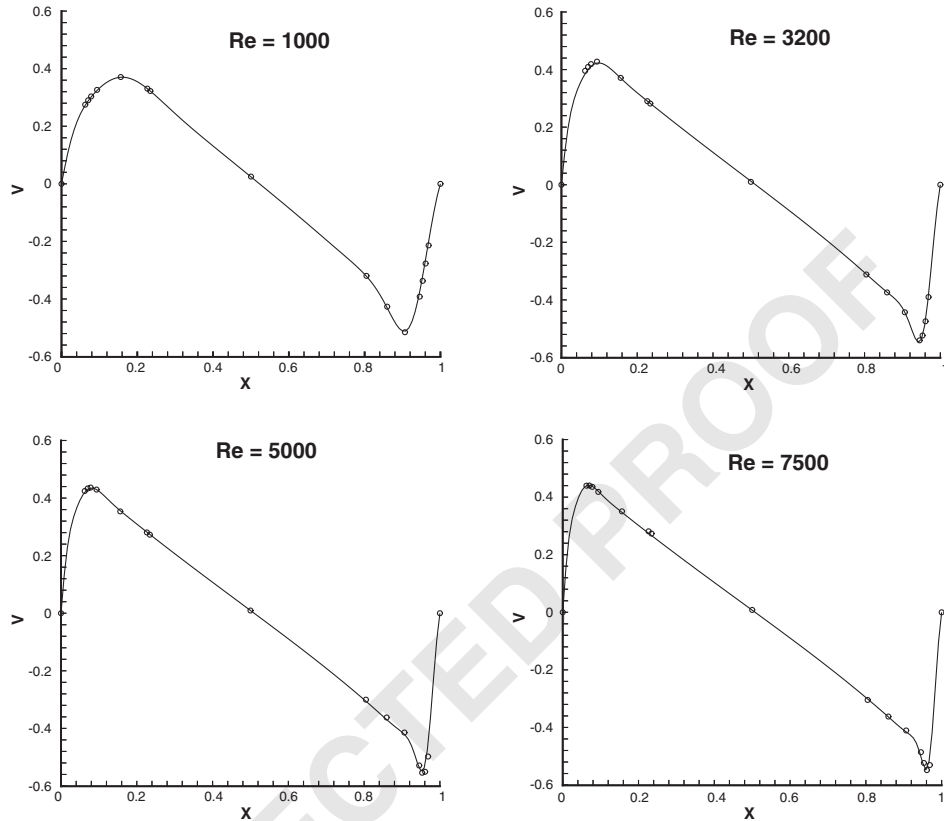


Figure 6. Profiles of velocity  $v$  at  $y = \frac{1}{2}$  for  $Re = 1000, 3200, 5000, 7500$ . Solid line: current result; circle: results given by Ghia *et al.* [24].

1 [4–10] with the above-mentioned techniques for parallel computations, the boundary element  
 3 method can be more efficiently applied to solve a lot of highly non-linear problems in science  
 and engineering.

5 Note that *only* the high-order iterative formulas ( $m \geq 2$ ) can ensure the convergence of  
 iterations at high Reynolds number  $Re = 7500$ , provided the value of the parameter  $p$   
 7 is properly chosen. Although we can always find a small enough value of  $p$  to ensure the  
 convergence of iteration at high Reynolds number, it is still an open question how to give  
 9 the best value of  $p$  to gain the best convergence rate *a priori*. Besides, many iterations are  
 needed for the high Reynolds number  $Re = 7500$ . So, it is worthwhile further increasing the  
 11 efficiency of the GBEM so that it can be employed to more complicated, three-dimensional  
 non-linear problems.

#### ACKNOWLEDGEMENTS

Thanks to Dr Ding Li for introducing us the software of Message Passing Interface (MPI). Thanks  
 to ‘National Science Fund for Distinguished Young Scholars’ (Approval No. 50125923) of Natural

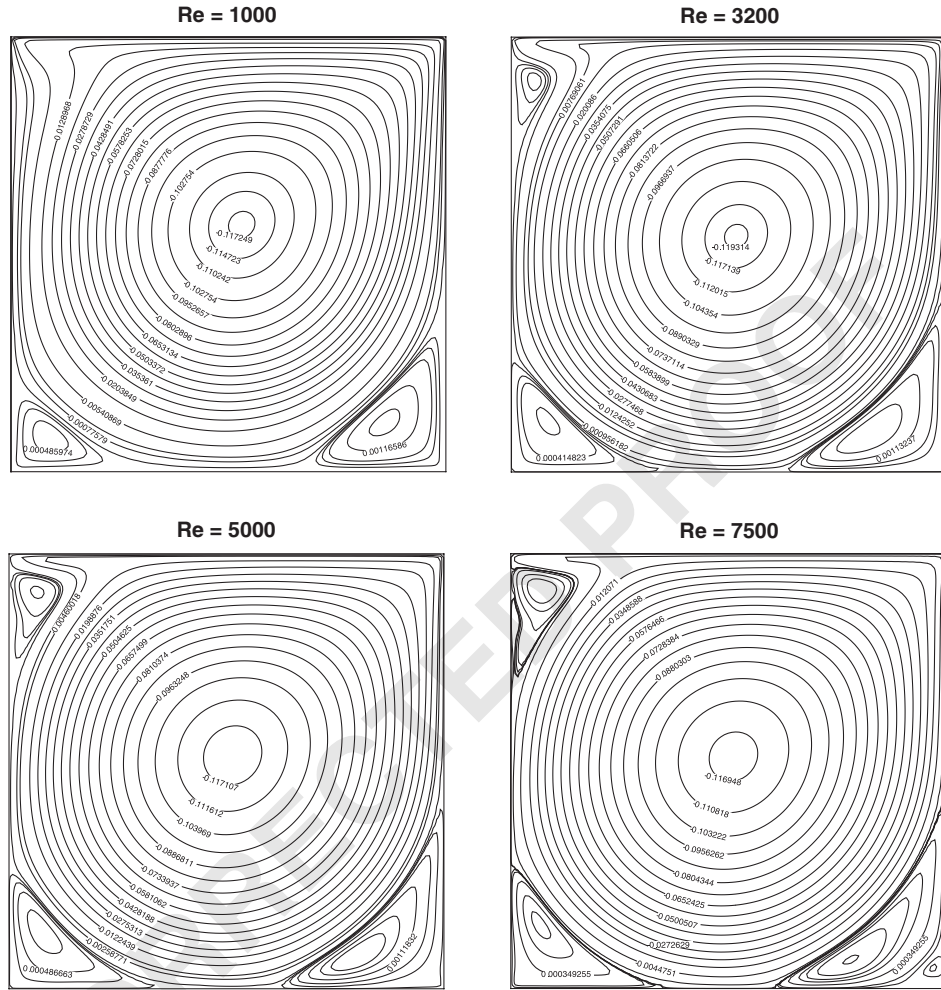


Figure 7. Contour of the stream-function  $\psi$  when  $Re = 1000, 3200, 5000, 7500$ .

Science Foundation of China, and ‘Fund of Supporting Outstanding Young Teachers’ of the Ministry of Education of China, for the financial support.

REFERENCES

1  
3  
5  
7  
9  
11

1. Ortega JH, Rheinboldt WC. *Iterative Solutions of Non-linear Equations in Several Variables*. Academic: New York, 1970.
2. Grigoriev MM, Dargush GF. A poly-region boundary element method for incompressible viscous fluid flows. *International Journal of Numerical Methods for Engineering* 1999; **46**:1127–1158.
3. Rodriguez-Prada HA, Pironti FF, Saez AE. Fundamental solutions of the streamfunction-vorticity fomulation of the Navier–Stokes equation. *International Journal for Numerical Methods in Fluids* 1990; **10**:1–12.
4. Liao SJ. Higher-order streamfunction-vorticity formulation of 2D steady-state Navier–Stokes equations. *International Journal of Numerical Methods for Fluids* 1992; **15**:595–612.
5. Liao SJ, Chwang AT. General boundary element method for non-linear problems. *International Journal for Numerical Methods in Fluids* 1996; **23**:467–483.

- 1 6. Liao SJ. High-order BEM formulations for strongly non-linear problems governed by quite general non-linear differential operators. *International Journal of Numerical Methods for fluids* 1996; **23**:739–751.
- 3 7. Liao SJ. On the general boundary element method. *Engineering Analysis with Boundary Elements* 1998; **21**(1):39–51.
- 5 8. Liao SJ, Chwang AT. General boundary element method for unsteady non-linear heat transfer problems. *International Journal of Heat and Man Transfer* (Part B) 1999; **35**:225–242.
- 7 9. Liao SJ. On the general boundary element method and its further generalizations. *International Journal Numerical Methods for Fluids* 1999; **31**:627–655.
- 9 10. Liao SJ. The proposed homotopy analysis technique for the solutions of non-linear problems. *Ph. D. Thesis*, Shanghai Jiao Tong University, 1992.
- 11 11. Liao SJ. A uniformly valid analytic solution of two dimensional viscous flow over a semi-infinite flat plate. *Journal of Fluid Mechanics* 1999; **385**:101–128.
- 13 12. Liao SJ, Campo A. Analytic solutions of the temperature distribution in Blasius viscous flow problems. *Journal of Fluid Mechanics* 2002; **453**:411–425.
- 15 13. Liao SJ. An analytic approximation of the drag coefficient for the viscous flow past a sphere. *International Journal of Non-Linear Mechanics* 2002; **37**:1–18.
- 17 14. Liao SJ. On the homotopy analysis method for non-linear problems. *Applied Mathematics and Computation*, to be published.
- 19 15. Passoni G, Cremonesi P, Alfonsi G. Analysis and implementation of a parallelization strategy on a Navier–Stokes solver for shear flow simulations. *Parallel Computing* 2001; **27**:1665–1685.
- 21 16. Lobry J, Manneback P. Parallel MR-BEM using ScaLAPACK. *Engineering Analysis with Boundary Elements* 1997; **19**:41–48.
- 23 17. Song SW, Baddour RE. Parallel processing for boundary element computations on distributed systems. *Engineering Analysis with Boundary Elements* 1997; **19**:73–84.
- 25 18. Davies AJ. Parallel implementations of the boundary element method. *Computers and Mathematics with Applications* 1996; **31**:33–40.
- 27 19. Davies AJ. Fine-grained parallel boundary elements. *Engineering Analysis with Boundary Elements* 1997; **19**:13–16.
- 29 20. Kreienmeyer M, Stein E. Efficient parallel solvers for boundary element equations using data decomposition. *Engineering Analysis with Boundary Elements* 1997; **19**:33–39.
- 31 21. Hempel R, Walker DW. The emergence of the MPI message passing standard for parallel computing. *Computer Standards and Interfaces* 1999; **21**:51–62.
- 33 22. Reuther J, Alonso JJ, Rimlinger MJ, Jameson A. Aerodynamic shape optimization of supersonic aircraft configurations via an adjoint formulation on distributed memory parallel computers. *Computers and Fluids* 1999; **28**:675–700.
- 35 23. Kamiya N, Iwase H, Kita E. Parallel adaptive boundary element analysis. *Computer Methods in Applied Mechanics and Engineering* 1997; **134**:341–350.
- 37 24. Ghia U, Ghia KN, Shin CT. High-Resolutions for incompressible Navier–Stokes equations and a multi-grid method. *Journal of Computational Physics* 1982; **48**:387–411.
- 39